

LED Goldstar FMM Non-Maintained Emergency



Catalogue No:
FMM9992/3/6/FP

Description:
Self Contained Non-Maintained LED
Emergency Luminaire.

Famco MasterMinder Computer
Monitoring and Control System
Complete with Flex & Plug.

Designed for Either Accessible or
Inaccessible Ceilings with Concealed
Mounting Clip Fixing.


LED Goldstar Kit includes Three
Different Size Trims for Multiple Cutout
Options.

Additional Options:

- Clear Dome Cover - Add /CC to Product Code when Ordering
- Black Version - Add /BL to Product Code when Ordering.

Australian conceived,
designed & manufactured.

www.famco.com.au

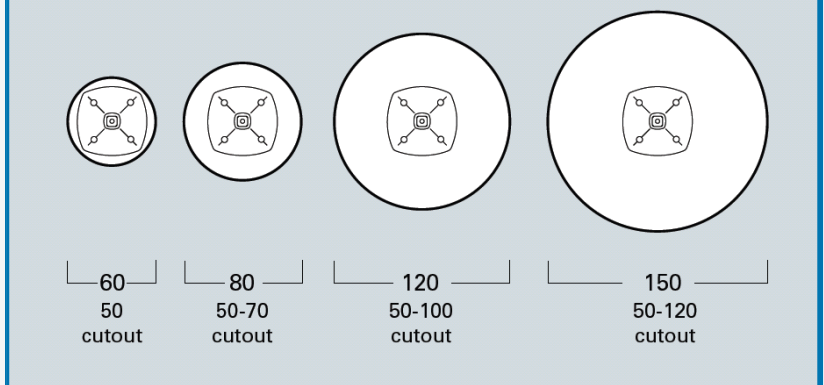

MAXIMUM PERMISSIBLE SPACING FOR EMERGENCY LUMINAIRES

PHOTOMETRIC CLASSIFICATION	MOUNTING HEIGHT - M															
	2.1	2.4	2.7	3.0	3.3	3.6	4.0	4.5	5	6	7	8	9	10	15	20
F9992/F9993 C0 D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1	19.4	
/F9996 D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1	19.4	