

201062 HYDROFLOOR MAXI COMPACT PERFORMANCE PRO LED


Round compact ground-recessed luminaire for outdoor installation, Phospho-chromatised and polyester powder coated die-cast copper-free aluminium body and stainless steel AISI 304 frame, tempered safety glass, moulded silicone gasket. Built-in LED driver 220-240V 50-60Hz, with 15 CREE XP-L LED. IP67 rating.

Energy Label A++


- Material: high corrosion resistance die-cast copper-free aluminum body
- Coating: polyester powder coating with phosphochromating pre-finish
- NR. 15 CREE "XP-L" LED
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel trim AISI 304
- Stainless steel screws
- Silicone rubber gasket
- Tempered safety glass.
- Max static weight resistance 5000 Kg
- Protection against impact IK10 (20 joule)
- Double M20 cable gland
- Polypropilene housing for recess included
- 1 mt. neoprene power cable included



1-10 V DIMMABLE / DALI VERSION
AVAILABLE ON REQUEST

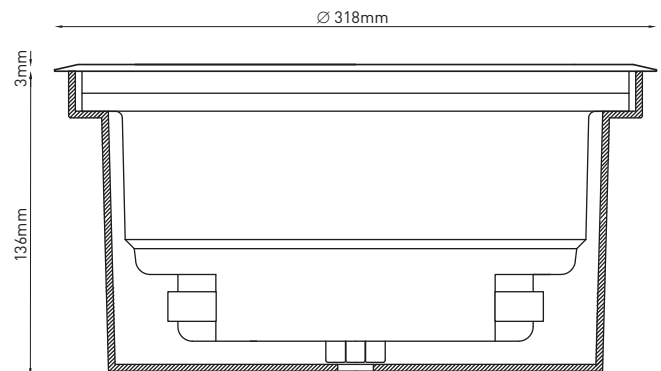

HOLE FOR RECESSING Ø 310mm

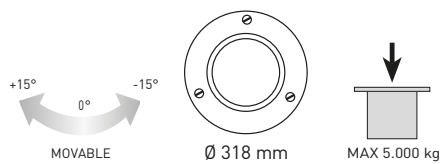

	LIGHT SOURCE	LED COLOR*	LIGHT BEAM OPTIONS	LUMEN OUTPUT (lm)	LUMINOUS EFFICACY (lm/w)	COLORS OPTIONS
40 WATT 220-240V 50-60HZ ELECTRONIC IP67 5 KG UNIT GROSS WEIGHT	HIGH-POWER LED	3.000°K WARM-WHITE	10°	3.680	92.00	STAINLESS STEEL
			30°	3.500	87.50	
			45° *	3.320	83.00	

* OTHER LIGHT COLORS AVAILABLE ON REQUEST: ○ 4.000°K NEUTRAL-WHITE - * 45° ON REQUEST