
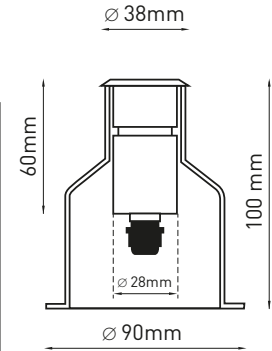


201001 HYDROFLOOR PICO LED

Round ground-recessed luminaire for outdoor installation, stainless steel AISI316 body and frame, tempered safety glass, moulded silicone gasket. With 1 CREE LED. 24V DC remote driver needed. IP67 rating.

Energy Label **A++**

- Completely made in stainless steel AISI 316 body
- NR. 1 x 1W CREE "XP-G3" LED
- Silicone rubber gasket
- Tempered safety glass.
- Polypropilene recessing box included.
- 1 mt. neoprene power cable included



	LIGHT SOURCE	LED COLOR*	LIGHT BEAM OPTIONS	LUMEN OUTPUT (lm)	LUMINOUS EFFICACY (lm/w)	COLORS OPTIONS
1 WATT 24V DC REMOTE DRIVER NEEDED IP67 0.30 KG UNIT GROSS WEIGHT	HIGH-POWER LED	3.000°K WARM-WHITE	M 25°	96	96.00	STAINLESS STEEL

REMOTE DRIVER SELECTION

BRAND	MANUFACTURER CODE	TYPE	WATT	IP RATE	NUMBERS OF FIXTURES
MEANWELL	LPV-20-24	CONSTANT VOLTAGE 24V DC	20W	IP67	MIN 1 - MAX 9
MEANWELL	LPV-35-24	CONSTANT VOLTAGE 24V DC	35W	IP67	MIN 1 - MAX 14
MEANWELL	LPV-60-24	CONSTANT VOLTAGE 24V DC	60W	IP67	MIN 1 - MAX 25
MEANWELL	LPV-100-24	CONSTANT VOLTAGE 24V DC	100W	IP67	MIN 1 - MAX 42