



R6/WL4LED3000 GEN 3

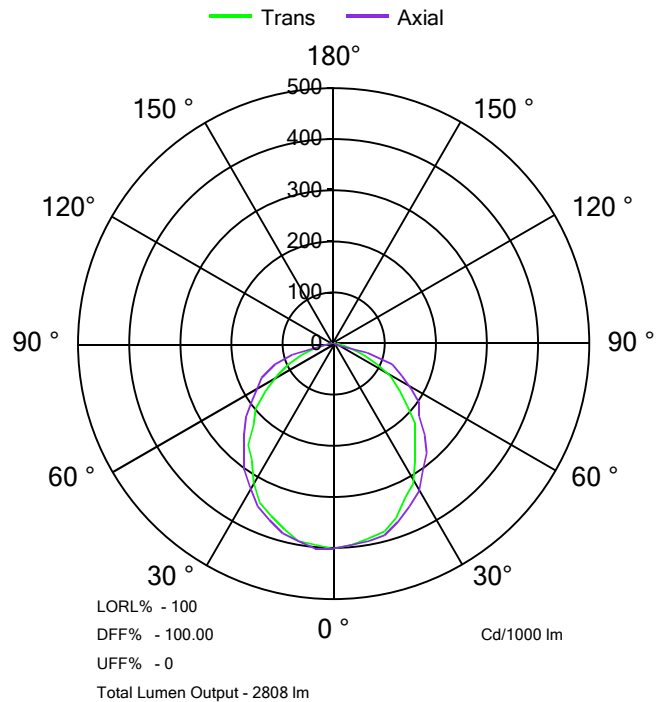

R6/WL4LED3000 GEN 3

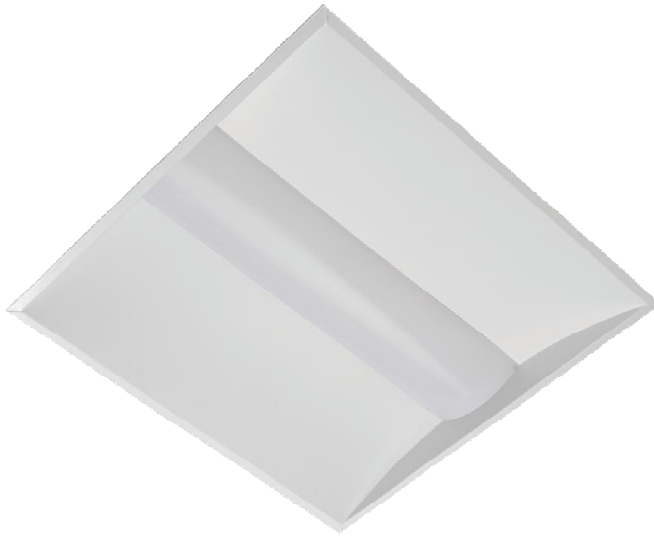

Utilization Factors UF() Standard Presentation				SHR NOM = 1.25							
Room Reflectance			Room Index								
C	W	F	0.75	1.00	1.25	1.5	2.0	2.5	3.0	4.00	5.00
0.70	0.50	0.20	0.59	0.69	0.76	0.82	0.89	0.94	0.97	1.02	1.04
	0.30		0.51	0.62	0.69	0.75	0.83	0.88	0.92	0.98	1.01
	0.10		0.46	0.56	0.64	0.70	0.78	0.84	0.88	0.94	0.98
0.70	0.50	0.20	0.57	0.67	0.74	0.79	0.86	0.90	0.93	0.98	1.00
	0.30		0.50	0.61	0.68	0.73	0.81	0.86	0.89	0.94	0.97
	0.10		0.45	0.55	0.63	0.68	0.76	0.82	0.86	0.92	0.95
0.70	0.50	0.20	0.56	0.65	0.72	0.76	0.83	0.87	0.90	0.94	0.96
	0.30		0.50	0.59	0.66	0.72	0.79	0.83	0.87	0.91	0.94
	0.10		0.45	0.55	0.62	0.67	0.75	0.80	0.84	0.89	0.92
0.00	0.00	0.00	0.43	0.52	0.59	0.64	0.72	0.76	0.80	0.85	0.87

Rating: Photometrically tested without ceiling board.
 Multiply UF values by service correction factors.
 Calculated in accordance with CIBS Technical Memorandum No. 5

	Cd/1000 lm	
	Axial	Trans.
0°	393.80	393.80
5°	391.07	388.39
10°	385.52	384.07
15°	379.99	371.83
20°	361.69	354.30
25°	345.59	332.63
30°	322.08	309.00
35°	298.38	275.94
40°	272.00	251.08
45°	247.24	218.66
50°	217.62	190.22
55°	196.42	157.73
60°	170.00	125.76
65°	148.56	92.79
70°	120.18	63.92
75°	74.82	38.47
80°	12.66	17.37
85°	2.52	4.59
90°	0.00	0.00

Luminaire Data

Luminaire Efficiency (LOR): 100
 Luminaire Efficacy lm/W : 101.6
 CIE Flux Codes : 50 82 97 100 100
 System Power W : 27.64
 Length mm : 597
 Width mm : 597
 Height mm : 110
 CRI / Colour Rendering Group : 85
 IP 20 protection class
 LED Light Source
 Class 1 Luminaire
 F Mark Luminaire

Photometric Test Reference : 9911393/#714
 Eulumdat Photometric File : R6-WL4LED3000 GEN 3