




ASD RHAPSODY 600x600 LED 6000



R6-WL4LED6000



Size	
A	597mm
B	597mm
C	110mm

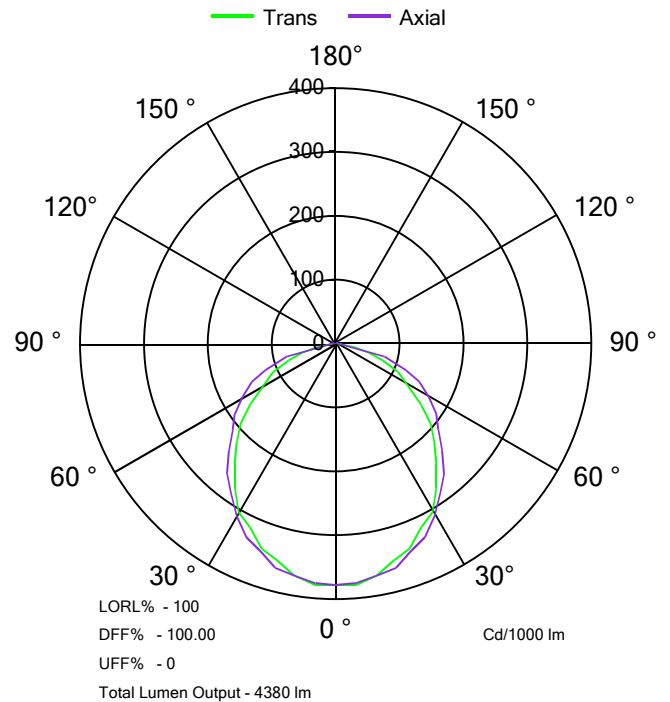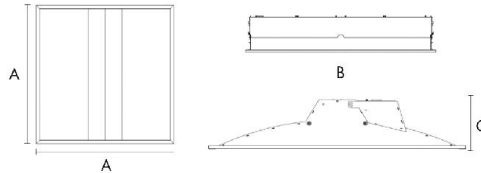

Utilization Factors UF() Standard Presentation				SHR NOM = 1.25							
Room Reflectance			Room Index								
C	W	F	0.75	1.00	1.25	1.5	2.0	2.5	3.0	4.00	5.00
0.70	0.50	0.20	0.57	0.68	0.75	0.80	0.87	0.93	0.96	1.01	1.04
	0.30		0.50	0.60	0.68	0.73	0.81	0.87	0.91	0.97	1.00
	0.10		0.44	0.54	0.62	0.68	0.76	0.82	0.87	0.93	0.97
0.70	0.50	0.20	0.56	0.66	0.72	0.77	0.84	0.89	0.92	0.97	0.99
	0.30		0.49	0.59	0.66	0.72	0.79	0.84	0.88	0.93	0.97
	0.10		0.44	0.54	0.61	0.67	0.75	0.80	0.85	0.90	0.94
0.70	0.50	0.20	0.54	0.64	0.70	0.75	0.81	0.86	0.89	0.93	0.96
	0.30		0.48	0.58	0.65	0.70	0.77	0.82	0.86	0.90	0.93
	0.10		0.43	0.53	0.60	0.66	0.73	0.79	0.83	0.88	0.91
0.00	0.00	0.00	0.41	0.51	0.58	0.63	0.70	0.75	0.79	0.83	0.86

Rating: Photometrically tested without ceiling board.
 Multiply UF values by service correction factors.
 Calculated in accordance with CIBS Technical Memorandum No. 5

	Cd/1000 lm	
	Axial	Trans.
0°	377.92	377.92
5°	376.67	378.46
10°	366.69	368.28
15°	361.38	351.60
20°	344.34	340.66
25°	332.31	317.68
30°	309.64	304.08
35°	286.06	274.17
40°	266.06	246.13
45°	235.62	219.92
50°	210.29	192.97
55°	191.25	164.31
60°	168.09	131.35
65°	143.49	107.16
70°	117.30	78.19
75°	80.51	53.61
80°	23.19	30.26
85°	3.52	12.20
90°	0.00	1.74

Luminaire Data

Luminaire Efficiency (LOR): 100
 Luminaire Efficacy lm/W : 89.9
 CIE Flux Codes : 48 79 96 100 100
 System Power W : 48.7
 Length mm : 597
 Width mm : 597
 Height mm : 110
 CRI / Colour Rendering Group : 80
 IP 20 protection class
 LED Light Source
 Class 1 Luminaire
 F Mark Luminaire

Photometric Test Reference : 9911233/#561/AR
 Eulumdat Photometric File : R6-WL4LED6000.Idt