



## ANTIPODES INL


### Indirect Softlight LED module

Recessed fitting for installation into gypsum plasterboard-type ceiling or into false ceiling with visible supporting structure.

These LED fitting are recommended for offices, for lighting areas with high requirements for light and glare control.

### FEATURES


Lifetime:	50 000h L80B50
Lamp type:	LED
Color temperature (K):	3000, 4000
Color rendering index CRI:	80-89, 90-100
Protection class:	I
Degree of protection (IP):	IP20
Mounting method:	Built-in
Body material:	White painted steel
Type of dimming:	DALI, 1-10 V, Not dimmable

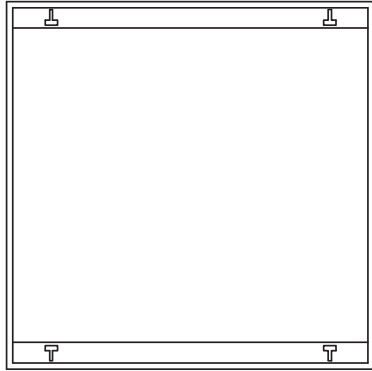

## Dimensions

Model 600

A	596mm
B	596mm
C	97mm

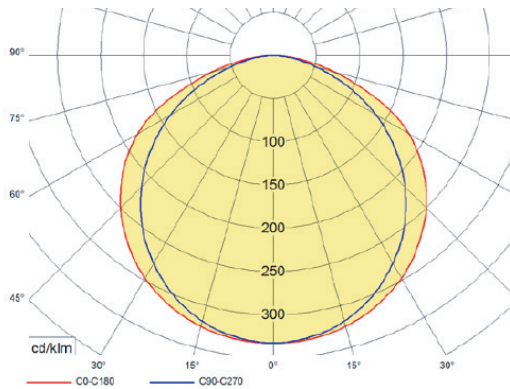

Body: White painted (RAL 9003) metal sheet

Optic: White painted matt reflector

LED: Mid Power LED

CRI 80 (CRI 90 on request)

3 warm white 3000K

4 cold white 4000K

Wiring: LED driver (constant current)  
 ND - not dimmable (standard)  
 DALI - digital dimmable DALI  
 DIM - dimmable 1-10V DC

IP20

INDIRECT



PREMIER



DIRECT



INDIRECT

CODE	Lamp Power (W)	Effective Luminous Flux (lm)	Colour Temperature (K)	Type of Dimming	Optical System	Raster (mm)
INLA1C3V1600/1050ND	50	3800	3000	Not dimmable	INL	600
INLA1C3V1600/1050NDK	50	3800	3000	Not dimmable	INL	600
INLA1C3V1600/1050NDK/90	50	3800	3000	Not dimmable	INL	600
INLA1C3V1600/700DALI	32	2750	3000	DALI	INL	600
INLA1C3V1600/700DIM	32	2750	3000	1-10V	INL	600
INLA1C3V1600/700DIMF5S	32	2750	3000	1-10V	INL	600
INLA1C3V1600/700ND	32	2750	3000	Not dimmable	INL	600
INLA1C3V1600/700NDF	32	2750	3000	Not dimmable	INL	600
INLA1C3V1600/700NDK	32	2750	3000	Not dimmable	INL	600
INLA1C4V1600/1050ND	50	3800	4000	Not dimmable	INL	600
INLA1C4V1600/1050NDK	50	3800	4000	Not dimmable	INL	600
INLA1C4V1600/700ND	32	2750	4000	Not dimmable	INL	600
INLA1C4V1600/700NDK	32	2750	4000	Not dimmable	INL	600
INLA1C5V1600/1050NDK	50	3800	3000	Not dimmable	INL	600