

Mirage Exit

LED Surface Mounted Luminaire



Catalogue No:
F9917L/SM


Description:
LED Ceiling Surface Mounted
Maintained Emergency Exit Luminaire.
Edge-Lit Solid Acrylic Diffuser with
Recessed Metal Body

Available Options:
F9917L/SM/SS/* Single Sided
F9917L/SM/DS/* Double Sided

* denotes:
/RMS Running Man Exit Straight
/RML Running Man Exit Arrow Left
/RMR Running Man Exit Arrow Right

Australian conceived,
designed & manufactured.

www.famco.com.au

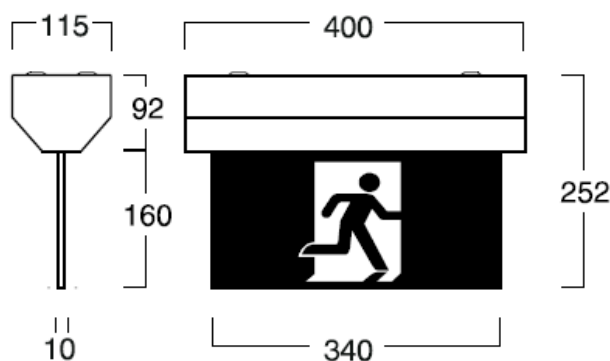

MAXIMUM PERMISSIBLE SPACING FOR EMERGENCY LUMINAIRES

| PHOTOMETRIC CLASSIFICATION | | | MOUNTING HEIGHT - M | | | | | | | | | | | | | | | |
|----------------------------|-----|-------|---------------------|-----|-----|-----|-----|-----|-----|-----|---|---|---|---|---|----|----|----|
| | | | 2.1 | 2.4 | 2.7 | 3.0 | 3.3 | 3.6 | 4.0 | 4.5 | 5 | 6 | 7 | 8 | 9 | 10 | 15 | 20 |
| F9917L/SS | C0 | E1.25 | 4.2 | 4.2 | 4.0 | 3.6 | 4.0 | 3.0 | | | | | | | | | | |
| | C90 | C1.25 | 3.2 | 3.1 | 2.8 | 2.4 | 1.7 | | | | | | | | | | | |
| F9917L/DS | C0 | E1.6 | 4.8 | 4.8 | 4.8 | 4.4 | 4.0 | 4.2 | 3.8 | | | | | | | | | |
| | C90 | E1.25 | 4.2 | 4.2 | 4.0 | 3.6 | 4.0 | 3.0 | | | | | | | | | | |